

1. Na stronie <https://github.com/new> tworzymy nowe repozytorium:

## Create a new repository

A repository contains all the files for your project, including the revision history.

Owner

 Piotrek85 ▾

Repository name

Przykład z zakupami ✓

Great repository names are **descriptive** and **unique**. Your new repository will be created as `Przyk-ad-z-zakupami` `metrical-guide`.

Description (optional)

- Public**  
Anyone can see this repository. You choose who can commit.
- Private**  
You choose who can see and commit to this repository.

- Initialize this repository with a README**  
This will let you immediately clone the repository to your computer. Skip this step if you're importing an existing repository.

Add .gitignore: **None** ▾

Add a license: **None** ▾ ⓘ

**Create repository**


2. Tworzymy plik README

### Quick setup — if you've done this kind of thing before

 Set up in Desktop or **HTTPS** **SSH** <https://github.com/Piotrek85/Przyk-ad-z-zakupami.git>

We recommend every repository include a [README](#), [LICENSE](#), and [.gitignore](#).

3. Można dodać opis i opisać commit:

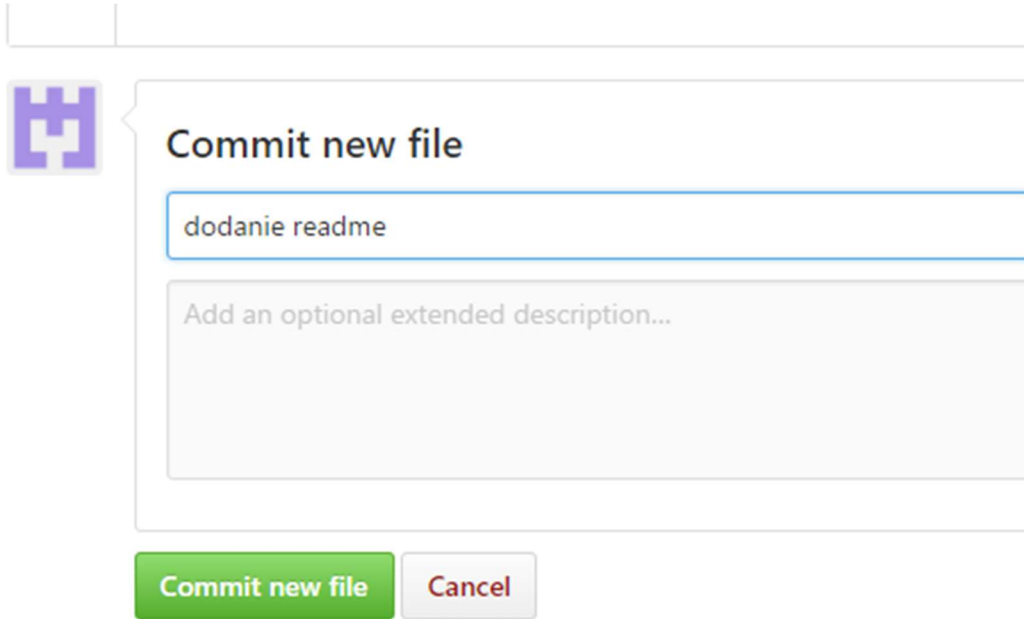


Commit new file

dodanie readme

Add an optional extended description...

Commit new file Cancel

4. Wybieramy opcję na przesłanie plików

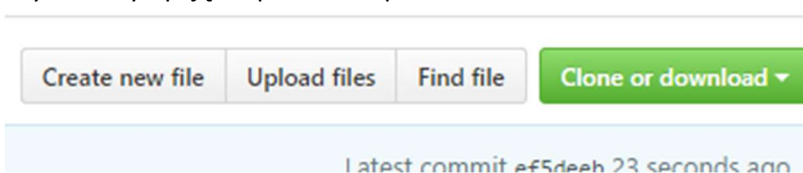


Create new file Upload files Find file Clone or download ▾

Latest commit ef5deeb 23 seconds ago


5. Wybieramy pliki lub foldery do przesłania. Opcja z folderami działa dobrze tylko na google chrome. Na koniec możemy opisać commit.

[Przyk-ad-z-zakupami /](#)

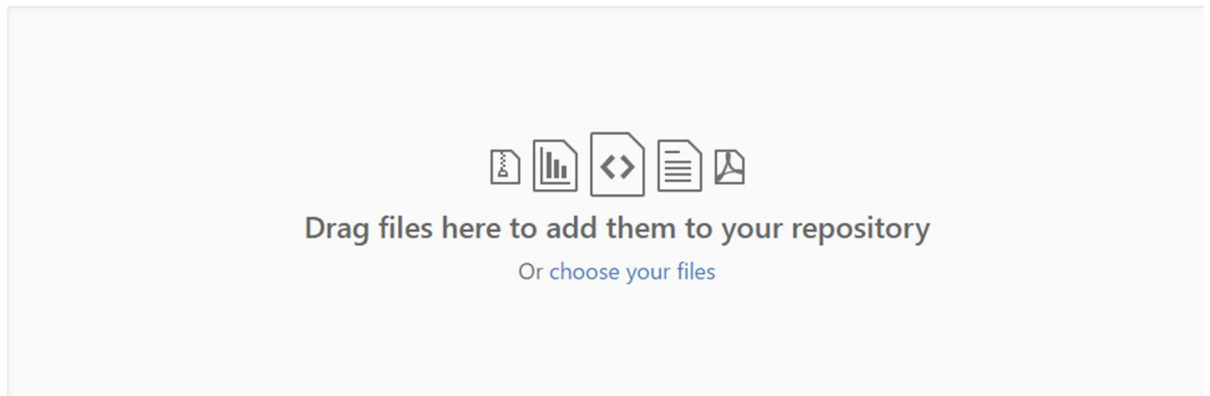

Drag files here to add them to your repository

Or choose your files

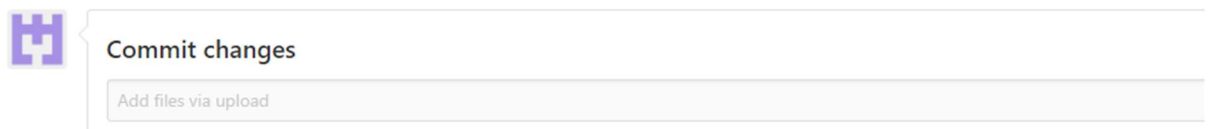

Commit changes

Add files via upload

6. Po chwili mamy już wrzucone pliki do repozytorium np. <https://github.com/Piotrek85/Przyk-ad-z-zakupami>